


## Cost-effective fabrication of thick composite structure with chopped fiber **billet stock**.

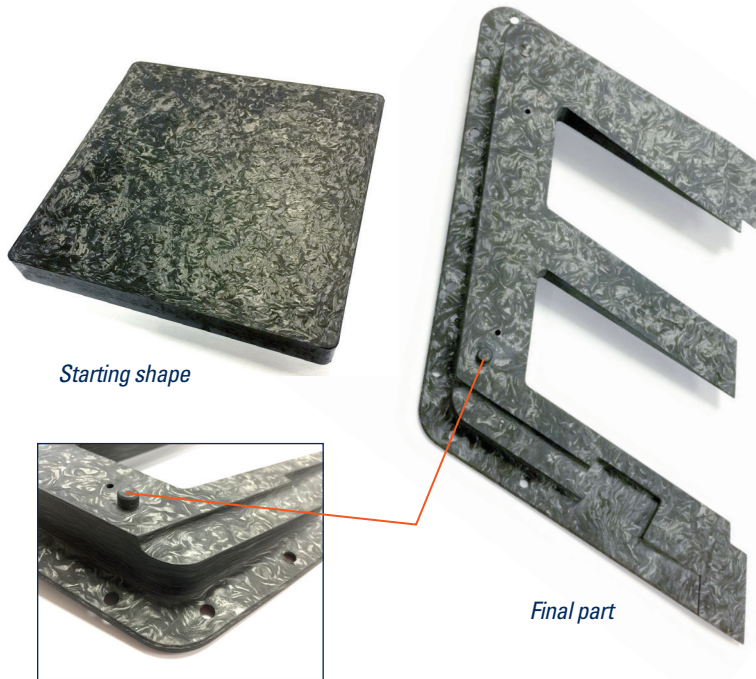

### BILLET BLOCK SIZES

Typical Thickness 13–63.5 mm (0.5–2.5 in)

- › 15.2 x 15.2 cm (6" x 6")
- › 20.3 x 25.4 cm (8" x 10")
- › 30.5 x 30.5 cm (12" x 12")
- › 45.7 x 45.7 cm (18" x 18")
- › 35.6 x 71.1 cm (14" x 28")

### TYPICAL APPLICATIONS

- › **Hard point attachments**
- › **Prototype/small-volume parts**
- › **Initial design of compression molded parts**
- › **Hard to fabricate complex composite parts**

### MS-4H MECHANICAL PROPERTIES

Properties	Condition	Method	Results	
Tensile Strength	RT	TCAC STM 11025 [ASTM D 3039]	144 MPa	20.9 ksi
Tensile Modulus	RT	TCAC STM 11025 [ASTM D 3039]	29.8 GPa	4.3 Msi
Flexural Strength	RT	ASTM D 6272	387 MPa	56.1 ksi
Flexural Modulus	RT	ASTM D 6272	29.7 GPa	4.3 Msi
Compressive Strength	RT	ASTM D 6484 (No Hole)	271 MPa	39.3 ksi
Compressive Modulus	RT	ASTM D 6484 (No Hole)	38.3 GPa	5.6 Msi
Pin Bearing (Single Shear)	RT	ASTM D 5961 Method B	441 MPa	63.9 ksi

### BENEFITS

- › **Part fabrication without the cost of tooling**
- › **Reduces the cost of thick composite laminate manufacturing**
- › **Provides significant labor efficiencies**
- › **Weight reduction of 40% over aluminum**

Revised 04/2018

BilletStock\_ProductHighlights\_v3.0\_2018-04-25 Page 1/1

© 2018. All data given is based on representative samples of the materials in question. Since the method and circumstances under which these materials are processed and tested are key to their performance, and TenCate has no assurance of how its customers will use the material, the corporation cannot guarantee these properties. TenCate®, (TenCate) AmberTool®, (TenCate) Cetex®, TenCate MicroPly™, and all other related characters, logos, and trade names are claims and/or registered trademarks of Koninklijke Ten Cate B.V. and/or its subsidiaries in one or more countries. Use of trademarks, trade names, and other IP rights of Royal TenCate without the express written approval of TenCate is strictly prohibited.