

 TENCATE

# AmberTool<sup>®</sup>

Composite Tooling Prepreg Selector Guide



**TOOLING REINVENTED**

 **TENCATE**  
ADVANCED COMPOSITES

 Toray Group

## TOOLING REINVENTED

The increased use of composites materials is driving the need for more advanced composite tooling solutions. Part manufacturers are demanding tools with longer life and tighter tolerances while pushing for more efficient production methods. The market demands a trusted technology partner that can provide world-class innovation, manufacturing, and service.

With more than 20 years of pedigree in demanding tooling applications, the TenCate AmberTool® collection of prepregs comprised of the HX, HXR, and TC series, is sold globally by a proven team of tooling experts. Our comprehensive range of prepregs for aerospace applications cure from 50°C (122°F) while delivering T<sub>g</sub> properties up to 213°C (415°F). These materials are available on a wide range of reinforcements, allowing our customers to have complete tool design freedom and flexibility.

## COMPLETE TOOL DESIGN FREEDOM

TenCate AmberTool® composite tooling prepregs allow high precision for molded and machined tooling applications with a superior degree of accuracy. We support our products globally, offering customers a complete technical support service including tailored training courses.



## INDUSTRY-LEADING COMPOSITE TOOLING EXPERIENCE

### Master and surface coat application

- › Compatible with high-performance epoxy paste and block master patterns
- › Specialized sealing and release agent recommendations
- › Excellent surface finish generation



### Full tooling delivery solutions

- › Custom cutting solutions within Europe
- › Fast delivery solutions for standard materials
- › Wide range of carbon and glass reinforcements with curing temperatures as low as 40°C (104°F) and T<sub>g</sub>'s up to 213°C (415°F) (after post cure)
- › Surface machinable for final accuracy
- › Carbon and glass backing structures



Courtesy of The National Composites Centre, UK

### Experienced technical support

- › Proven processing procedures and full tooling processing guide available
- › Tailored training courses offered
- › Specialized tooling knowledge on surface treatments and advanced experience in mold heating applications
- › Mold life-cycle maintenance solutions
- › New materials research, assuring health and safety compliance

# COMPOSITE TOOLING PREPREGS

## Product Overview

### TENCATE AMBERTOOL® COMPOSITE TOOLING PREPREGS

	RESIN	T <sub>g</sub> (ONSET)*1	MIN CURE TEMP	TYPICAL CURE TIME AND TEMPERATURE*2	TACK LIFE	KEY PRODUCT CHARACTERISTICS	AEROSPACE	INDUSTRIAL	MOTORSPORT	AUTOMOTIVE	ENERGY
HX32-1*3 <b>NEW</b>	Epoxy	162°C (323°F)	65°C (149°F)	12 hours at 70°C (158°F)	30 days	› Long tack life for large applications		○			○
HXR56*3 <b>NEW</b>	Epoxy	185°C (365°F)	40°C (104°F)	8.5 hours at 50°C (122°F)	50 hours	› Quasi-isotropic two-layer product for rapid lamination		○	○	○	○
HX56*3	Epoxy	185°C (365°F)	40°C (104°F)	8.5 hours at 50°C (122°F)	50 hours	› Improved handleability		○	○	○	○
HX50*3	Epoxy	190°C (374°F)	40°C (104°F)	8.5 hours at 50°C (122°F)	60 hours	› Excellent surface finish		○	○	○	
HX42	Epoxy	200°C (392°F)	50°C (122°F)	8 hours at 60°C (140°F)	5 days	› Proven system for aerospace	○	○	○	○	
HX40	Epoxy	203°C (397°F)	50°C (122°F)	12 hours at 65°C (149°F)	8 days	› Large tooling applications	○	○			○
TC40*4	BMI	213°C (415°F)	182°C (360°F)	6 hours at 182°C (360°F)	14 days	› High service temperature	○				

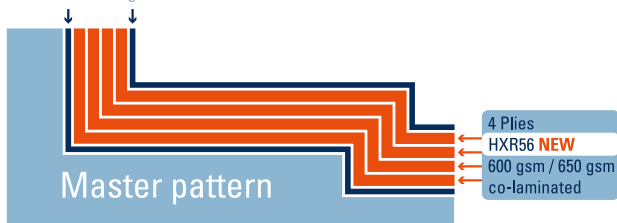
\*1 after post cure \*2 followed by post cure | Sourced from: \*3 Europe \*4 North America





### NEW PRODUCTS

TenCate AmberTool® HXR56 is the latest innovation from our heritage range of composite tooling prepregs. The new TenCate AmberTool® HXR series is a multi-axial format, specifically designed for when complexity and speed are required, ultimately reducing overall tooling costs.

#### Example of HXR lay-up:

2 Plies HX56 205 gsm 2x2 twill



			
TOOL DESIGN FREEDOM AND FLEXIBILITY	INTRINSICALLY QUASI-ISOTROPIC	HANDLEABLE AT AMBIENT TEMPERATURES	EXCELLENT SURFACE FINISH



(Search for TenCate Product Selector)

For more product information, please refer to our app, our website [www.tencatecomposites.com/tooling](http://www.tencatecomposites.com/tooling), and our online resource center for processing information, also available in print copy.

# LOCATIONS AND CAPABILITIES

## SOLUTIONS

- Thermoplastic composites
- Thermoplastic laminates

- Thermoset composites
- Carbon free manufacturing

- Parts manufacture
- Sales office

## CERTIFICATIONS

- ISO 9001:2015
- AS9100:2015 Rev.D

Fairfield - California, United States

- ● ● ● ● ● ● ●

Morgan Hill - California, United States

- ● ● ● ● ● ● ●

Camarillo - California, United States

- ● ● ● ● ● ● ●

Nottingham, United Kingdom

- ● ● ● ● ● ● ●

Nijverdal, The Netherlands

- ● ● ● ● ● ● ●

Toulouse, France

- ● ● ● ● ● ● ●

Beijing, China

- ● ● ● ● ● ● ●

Guangzhou, China

- ● ● ● ● ● ● ●

Taichung, Taiwan

- ● ● ● ● ● ● ●

## TENCATE ADVANCED COMPOSITES

18255 Sutter Blvd.  
Morgan Hill, CA 95037  
Tel: +1 408 465 8500  
info@tcac-usa.com

## TENCATE ADVANCED COMPOSITES

2450 Cordelia Road  
Fairfield, CA 94534  
Tel: +1 707 359 3400  
info@tcac-usa.com

## TENCATE ADVANCED COMPOSITES

Amber Drive, Langley Mill  
Nottingham, NG16 4BE UK  
Tel: +44 (0)1773 530899  
tcacsales@tencate.com



(Search for TenCate Product Selector)

For product information, please refer to our app, our website [www.tencatecomposites.com](http://www.tencatecomposites.com), and our online resource center for case studies and technical papers.

©2018. All data given is based on representative samples of the materials in question. Since the method and circumstances under which these materials are processed and tested are key to their performance, and TenCate Advanced Composites has no assurance of how its customers will use the material, the corporation cannot guarantee these properties. TenCate®, (TenCate) AmberTool®, (TenCate) Cetex®, (TenCate) CFRT®, (TenCate) MicroPly™, and all other related characters, logos, and trade names are claims and/or registered trademarks of Koninklijke Ten Cate B.V., Toray Industries Inc. and/or its affiliated companies in one or more countries. Use of trademarks, trade names, and other IP rights of Koninklijke Ten Cate B.V. or TenCate Advanced Composites without prior written approval by such is strictly prohibited.

TCAC\_AmberToolSelector\_v4.0\_2018-10-25

[www.tencatecomposites.com/tooling](http://www.tencatecomposites.com/tooling)

